




# Pulegge Dentate Passo HTD per Bussola Conica

## HTD Pitch Taper Bore Timing Pulleys

### HTD 14M

Passo 14mm / 14mm Pitch




Materiale: Acciaio e Ghisa

Material: Steel & Cast Iron

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L	Bussola Taper Bush
HTD 14M per cinghia di larghezza 40 mm HTD 14M for 40 mm width belt	T 28 14M 40 F	4F	28	124,78	121,98	128,0	-	54	32	2012
	T 29 14M 40 F	4F	29	129,23	126,44	138,0	-	54	32	2012
	T 30 14M 40 F	4F	30	133,69	130,90	138,0	-	54	32	2012
	T 32 14M 40 F	4F	32	142,60	139,81	154,0	-	54	32	2012
	T 34 14M 40 F	4F	34	151,51	148,72	160,0	-	54	45	2517
	T 36 14M 40 F	4F	36	160,43	157,68	168,0	-	54	45	2517
	T 38 14M 40 F	4F	38	169,34	166,60	183,0	-	54	45	2517
	T 40 14M 40 F	4F	40	178,25	175,49	188,0	-	54	45	2517
	T 44 14M 40 F	4F	44	196,08	193,28	211,0	-	54	51	3020
	T 48 14M 40 F	4F	48	213,90	211,11	226,0	-	54	51	3020
	T 56 14M 40 F	9WF	56	249,55	246,76	256,0	170	54	51	3020
	T 64 14M 40 F	9WF	64	285,21	282,41	296,0	170	54	51	3020
	T 72 14M 40	9A	72	320,86	318,06	-	170	54	51	3020
	T 80 14M 40	9A	80	356,51	353,71	-	170	54	51	3020
	T 90 14M 40	9A	90	401,07	398,28	-	170	54	51	3020
	T 112 14M 40	9A	112	499,11	496,32	-	170	54	51	3020
	T 144 14M 40	9A	144	641,71	638,92	-	170	54	51	3020
	T 168 14M 40	9A	168	748,66	745,87	-	170	54	51	3020
T 192 14M 40	9A	192	855,62	852,82	-	170	54	51	3020	
T 216 14M 40	9A	216	962,57	959,76	-	170	54	51	3020	
HTD 14M per cinghia di larghezza 55 mm HTD 14M for 55 mm width belt	T 28 14M 55 F	4F	28	124,78	121,98	128,0	-	70	32	2012
	T 29 14M 55 F	4F	29	129,23	126,44	138,0	-	70	32	2012
	T 30 14M 55 F	4F	30	133,69	130,90	138,0	-	70	45	2517
	T 32 14M 55 F	4F	32	142,60	139,81	154,0	-	70	45	2517
	T 34 14M 55 F	4F	34	151,51	148,72	160,0	-	70	45	2517
	T 36 14M 55 F	4F	36	160,43	157,68	168,0	-	70	45	2517
	T 38 14M 55 F	4F	38	169,34	166,60	183,0	-	70	45	2517
	T 40 14M 55 F	4F	40	178,25	175,49	188,0	-	70	45	2517
	T 44 14M 55 F	4F	44	196,08	193,28	211,0	-	70	51	3020
	T 48 14M 55 F	4F	48	213,90	211,11	226,0	-	70	51	3020
	T 56 14M 55 F	9WF	56	249,55	246,76	256,0	170	70	51	3020
	T 64 14M 55 F	9WF	64	285,21	282,41	296,0	170	70	51	3020
	T 72 14M 55	9A	72	320,86	318,06	-	170	70	51	3020
	T 80 14M 55	9A	80	356,51	353,71	-	170	70	51	3020
	T 90 14M 55	9A	90	401,07	398,28	-	170	70	51	3020
	T 112 14M 55	9A	112	499,11	496,32	-	170	70	51	3020
	T 144 14M 55	9A	144	641,71	638,92	-	170	70	51	3020

### HTD 14M

Passo 14mm / 14mm Pitch

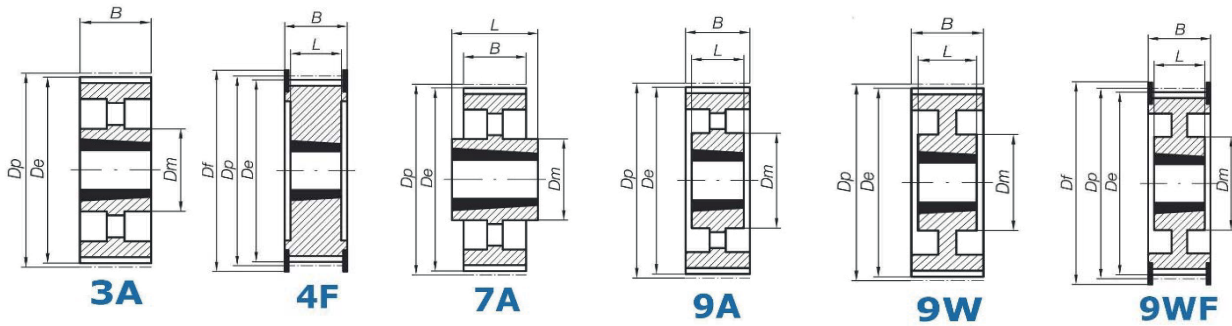

Materiale: Acciaio e Ghisa

Material: Steel & Cast Iron




	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L	Bussola Taper Bush
	T 168 14M 55	9A	168	748,66	745,87	-	170	70	51	3020
	T 192 14M 55	9A	192	855,62	852,82	-	170	70	51	3020
	T 216 14M 55	7A	216	962,57	959,76	-	190	70	89	3535
HTD 14M 85 (passo 14 mm) per cinghia di larghezza 85 mm HTD 14M 85 (14 mm pitch) for 85 mm width belt	T 28 14M 85 F	4F	28	124,78	121,98	128,0	-	102	45	2517
	T 29 14M 85 F	4F	29	129,23	126,44	138,0	-	102	45	2517
	T 30 14M 85 F	4F	30	133,69	130,90	138,0	-	102	45	2517
	T 32 14M 85 F	4F	32	142,60	139,81	154,0	-	102	45	2517
	T 34 14M 85 F	4F	34	151,51	148,72	160,0	-	102	45	2517
	T 36 14M 85 F	4F	36	160,43	157,68	168,0	-	102	51	3020
	T 38 14M 85 F	4F	38	169,34	166,60	183,0	-	102	51	3020
	T 40 14M 85 F	4F	40	178,25	175,49	188,0	-	102	51	3020
	T 44 14M 85 F	4F	44	196,08	193,28	211,0	-	102	51	3020
	T 48 14M 85 F	4F	48	213,90	211,11	226,0	-	102	51	3020
	T 56 14M 85 F	4F	56	249,55	246,76	256,0	-	102	65	3525
	T 64 14M 85 F	9WF	64	285,21	282,41	296,0	190	102	65	3525
	T 72 14M 85	9W	72	320,86	318,06	-	190	102	65	3525
	T 80 14M 85	9A	80	356,51	353,71	-	190	102	65	3525
	T 90 14M 85	9A	90	401,07	398,28	-	190	102	65	3525
	T 112 14M 85	9A	112	499,11	496,32	-	190	102	65	3525
T 144 14M 85	9A	144	641,71	638,92	-	190	102	65	3525	
T 168 14M 85	9A	168	748,66	745,87	-	190	102	65	3525	
T 192 14M 85	3A	192	855,62	852,82	-	230	102	102	4040	
T 216 14M 85	3A	216	962,57	959,76	-	230	102	102	4040	
HTD 14M per cinghia di larghezza 115 mm HTD 14M for 115 mm width belt	T 29 14M 115 F	4F	29	129,23	126,44	138,0	-	133	45	2517
	T 30 14M 115 F	4F	30	133,69	130,90	138,0	-	133	45	2517
	T 32 14M 115 F	4F	32	142,60	139,81	154,0	-	133	45	2517
	T 34 14M 115 F	4F	34	151,51	148,72	160,0	-	133	45	2517
	T 36 14M 115 F	4F	36	160,43	157,68	168,0	-	133	51	3020
	T 38 14M 115 F	4F	38	169,34	166,60	183,0	-	133	51	3020
	T 40 14M 115 F	4F	40	178,25	175,49	188,0	-	133	51	3020
	T 44 14M 115 F	4F	44	196,08	193,28	211,0	-	133	76	3030
	T 48 14M 115 F	4F	48	213,90	211,11	226,0	-	133	76	3030
	T 56 14M 115 F	4F	56	249,55	246,76	256,0	-	133	89	3535
	T 64 14M 115 F	9WF	64	285,21	282,41	296,0	190	133	89	3535
	T 72 14M 115	9W	72	320,86	318,06	-	190	133	89	3535
T 80 14M 115	9A	80	356,51	353,71	-	190	133	89	3535	
T 90 14M 115	9A	90	401,07	398,28	-	190	133	89	3535	

# Pulegge Dentate Passo HTD per Bussola Conica

## HTD Pitch Taper Bore Timing Pulleys

### HTD 14M

Passo 14mm / 14mm Pitch



Materiale: Acciaio e Ghisa

Material: Steel & Cast Iron

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L	Bussola Taper Bush
	T 112 14M 115	9A	112	499,11	496,32	-	190	133	89	3535
	T 144 14M 115	9A	144	641,71	638,92	-	230	133	102	4040
	T 168 14M 115	9A	168	748,66	745,87	-	230	133	102	4040
	T 192 14M 115	9A	192	855,62	852,82	-	230	133	102	4040
	T 216 14M 115	9A	216	962,57	959,76	-	230	133	102	4040
HTD 14M per cinghia di larghezza 170 mm HTD 14M for 170 mm width belt	T 38 14M 170 F	4F	38	169,34	166,60	183,0	-	187	76	3030
	T 40 14M 170 F	4F	40	178,25	175,49	188,0	-	187	76	3030
	T 44 14M 170 F	4F	44	196,08	193,28	211,0	-	187	89	3535
	T 48 14M 170 F	4F	48	213,90	211,11	226,0	-	187	89	3535
	T 56 14M 170 F	4F	56	249,55	246,76	256,0	-	187	89	3535
	T 64 14M 170 F	4F	64	285,21	282,41	296,0	-	187	102	4040
	T 72 14M 170	9W	72	320,86	318,06	-	230	187	102	4040
	T 80 14M 170	9W	80	356,51	353,71	-	230	187	102	4040
	T 90 14M 170	9A	90	401,07	398,28	-	230	187	102	4040
	T 112 14M 170	9A	112	499,11	496,32	-	265	187	127	5050
	T 144 14M 170	9A	144	641,71	638,92	-	265	187	127	5050
	T 168 14M 170	9A	168	748,66	745,87	-	265	187	127	5050
	T 192 14M 170	9A	192	855,62	852,82	-	265	187	127	5050
T 216 14M 170	9A	216	962,57	959,76	-	265	187	127	5050	

Df e Dm possono variare senza preavviso | Df and Dm can vary without notice

Nelle forme costruttive gli scarichi di alleggerimento possono leggermente variare | During manufacturing, the lightening relief may vary slightly