


Pulegge Dentate Passo Pollici

Imperial Pitch Timing Pulleys

H

Passo 12,7mm / 1/2" Pitch

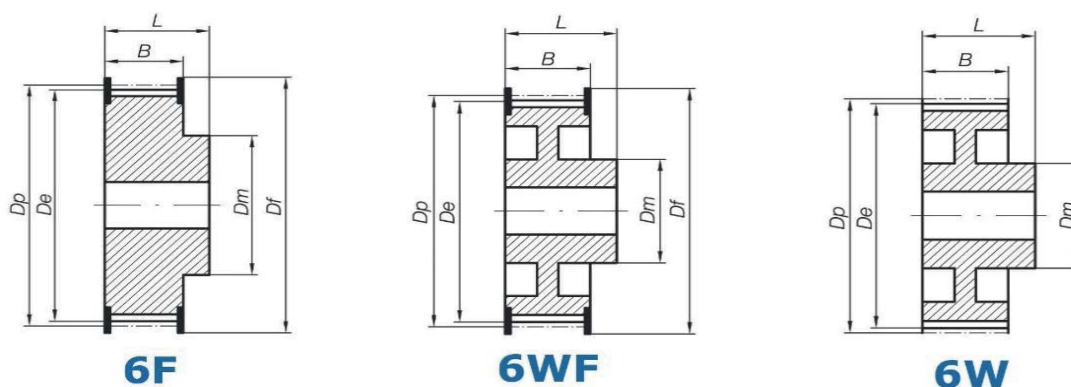


Materiale: Acciaio

Material: Steel

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L
H per cinghia di larghezza 0,75" - 19,05 mm H for 0,75" - 19,05 mm width belt	14 H 075 F	6F	14	56,60	55,23	64,0	40	26	40
	15 H 075 F	6F	15	60,64	59,27	66,5	45	26	40
	16 H 075 F	6F	16	64,68	63,31	70,0	45	26	40
	17 H 075 F	6F	17	68,72	67,35	75,0	45	26	40
	18 H 075 F	6F	18	72,77	71,40	79,0	55	26	40
	19 H 075 F	6F	19	76,81	75,44	82,5	60	26	40
	20 H 075 F	6F	20	80,85	79,48	87,0	62	26	40
	21 H 075 F	6F	21	84,89	83,52	91,0	65	26	40
	22 H 075 F	6F	22	88,94	87,57	94,0	68	26	40
	23 H 075 F	6F	23	92,98	91,61	97,0	72	26	40
	24 H 075 F	6F	24	97,02	95,65	102,0	72	26	40
	25 H 075 F	6F	25	101,06	99,69	106,0	72	26	40
	26 H 075 F	6F	26	105,11	103,74	112,0	80	26	40
	27 H 075 F	6F	27	109,15	107,78	115,0	80	26	40
	28 H 075 F	6F	28	113,19	111,82	120,0	80	26	40
	29 H 075 F	6F	29	117,23	115,86	120,0	80	26	40
	30 H 075 F	6F	30	121,28	119,91	128,0	80	26	40
	32 H 075 F	6F	32	129,36	127,99	135,0	80	26	40
	33 H 075 F	6F	33	133,40	132,03	142,0	80	26	40
	34 H 075 F	6F	34	137,45	136,08	142,0	80	26	40
35 H 075 F	6F	35	141,49	140,12	150,0	80	26	40	
36 H 075 F	6F	36	145,53	144,16	150,0	80	26	40	
38 H 075 F	6F	38	153,62	152,25	158,0	80	26	40	
40 H 075 F	6F	40	161,70	160,33	168,0	80	26	40	
44 H 075 F	6WF	44	177,87	176,50	184,0	80	26	40	
45 H 075 F	6WF	45	181,91	180,54	192,0	80	26	40	
48 H 075 F	6WF	48	194,04	192,67	200,0	90	26	45	
50 H 075	6W	50	202,13	200,76	-	90	26	45	
H per cinghia da 25,4 mm H for 25,4 mm width belt	14 H 100 F	6F	14	56,60	55,23	64,0	40	32	45
	15 H 100 F	6F	15	60,64	59,27	66,5	45	32	45
	16 H 100 F	6F	16	64,68	63,31	70,0	45	32	45
	17 H 100 F	6F	17	68,72	67,35	75,0	45	32	45
	18 H 100 F	6F	18	72,77	71,40	79,0	55	32	45
	19 H 100 F	6F	19	76,81	75,44	82,5	60	32	45
	20 H 100 F	6F	20	80,85	79,48	87,0	62	32	45
	21 H 100 F	6F	21	84,89	83,52	91,0	65	32	45
22 H 100 F	6F	22	88,94	87,57	94,0	68	32	45	

H

Passo 12,7mm / 1/2" Pitch

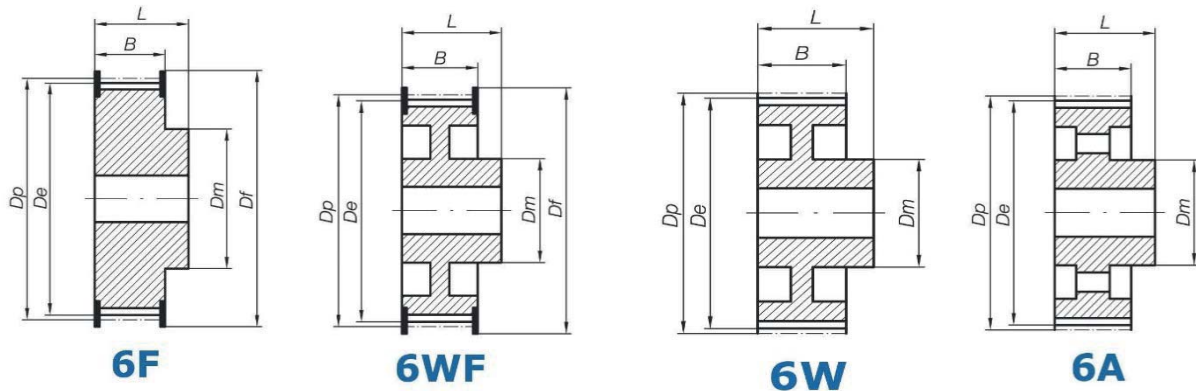

Materiale: Acciaio

Material: Steel

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L
H per cinghia di larghezza 1,00" - 25,4 mm H for 1,00" - 25,4 mm width belt H for 1,00" - 25,4 mm width belt	23 H 100 F	6F	23	92,98	91,61	97,0	72	32	45
	24 H 100 F	6F	24	97,02	95,65	102,0	72	32	45
	25 H 100 F	6F	25	101,06	99,69	106,0	72	32	45
	26 H 100 F	6F	26	105,11	103,74	112,0	80	32	45
	27 H 100 F	6F	27	109,15	107,78	115,0	80	32	45
	28 H 100 F	6F	28	113,19	111,82	120,0	80	32	45
	29 H 100 F	6F	29	117,23	115,86	120,0	80	32	45
	30 H 100 F	6F	30	121,28	119,91	128,0	80	32	45
	32 H 100 F	6F	32	129,36	127,99	135,0	80	32	45
	33 H 100 F	6F	33	133,40	132,03	142,0	80	32	45
	34 H 100 F	6F	34	137,45	136,08	142,0	80	32	45
	35 H 100 F	6F	35	141,49	140,12	150,0	80	32	45
	36 H 100 F	6WF	36	145,53	144,16	150,0	80	32	45
	38 H 100 F	6WF	38	153,62	152,25	158,0	80	32	45
	40 H 100 F	6WF	40	161,70	160,33	168,0	80	32	45
	44 H 100 F	6WF	44	177,87	176,50	184,0	80	32	50
	45 H 100 F	6WF	45	181,91	180,54	192,0	80	32	50
	48 H 100 F	6WF	48	194,04	192,67	200,0	90	32	50
	50 H 100	6W	50	202,13	200,76	-	90	32	50
	52 H 100	6W	52	210,21	208,84	-	90	32	50
58 H 100	6A	58	234,47	233,10	-	90	32	50	
60 H 100	6A	60	242,55	241,18	-	90	32	50	
70 H 100	6A	70	282,98	281,61	-	100	32	55	
72 H 100	6A	72	291,06	289,69	-	100	32	55	
84 H 100	6A	84	339,57	338,20	-	100	32	55	
96 H 100	6A	96	388,08	386,71	-	120	32	60	
H per cinghia da 38,1 mm H for 38,1 mm width belt	14 H 150 F	6F	14	56,60	55,23	64,0	40	46	58
	15 H 150 F	6F	15	60,64	59,27	66,5	45	46	58
	16 H 150 F	6F	16	64,68	63,31	70,0	45	46	58
	17 H 150 F	6F	17	68,72	67,35	75,0	45	46	58
	18 H 150 F	6F	18	72,77	71,40	79,0	55	46	58
	19 H 150 F	6F	19	76,81	75,44	82,5	60	46	58
	20 H 150 F	6F	20	80,85	79,48	87,0	62	46	58
	21 H 150 F	6F	21	84,89	83,52	91,0	65	46	58
	22 H 150 F	6F	22	88,94	87,57	94,0	68	46	58
	23 H 150 F	6F	23	92,98	91,61	97,0	72	46	58
24 H 150 F	6F	24	97,02	95,65	102,0	72	46	58	

Pulegge Dentate Passo Pollici

Imperial Pitch Timing Pulleys

H

Passo 12.7mm / 1/2" Pitch




Materiale: Acciaio

Material: Steel

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L
H per cinghia di larghezza 1,5" - 38,1 mm H for 1,50" - 38,1 mm width belt	25 H 150 F	6F	25	101,06	99,69	106,0	72	46	58
	26 H 150 F	6F	26	105,11	103,74	112,0	80	46	58
	27 H 150 F	6F	27	109,15	107,78	115,0	80	46	58
	28 H 150 F	6F	28	113,19	111,82	120,0	80	46	58
	29 H 150 F	6F	29	117,23	115,86	120,0	80	46	58
	30 H 150 F	6F	30	121,28	119,91	128,0	80	46	58
	32 H 150 F	6F	32	129,36	127,99	135,0	80	46	58
	33 H 150 F	6F	33	133,40	132,03	142,0	80	46	58
	34 H 150 F	6F	34	137,45	136,08	142,0	80	46	58
	35 H 150 F	6F	35	141,49	140,12	150,0	80	46	58
	36 H 150 F	6WF	36	145,53	144,16	150,0	80	46	58
	38 H 150 F	6WF	38	153,62	152,25	158,0	80	46	58
	40 H 150 F	6WF	40	161,70	160,33	168,0	80	46	58
	44 H 150 F	6WF	44	177,87	176,50	184,0	80	46	58
	45 H 150 F	6WF	45	181,91	180,54	192,0	80	46	58
	48 H 150 F	6WF	48	194,04	192,67	200,0	90	46	65
	50 H 150	6W	50	202,13	200,76	-	90	46	65
	52 H 150	6W	52	210,21	208,84	-	90	46	65
	58 H 150	6A	58	234,47	233,10	-	90	46	65
60 H 150	6A	60	242,55	241,18	-	90	46	65	
70 H 150	6A	70	282,98	281,61	-	100	46	65	
72 H 150	6A	72	291,06	289,69	-	100	46	65	
84 H 150	6A	84	339,57	338,20	-	100	46	65	
96 H 150	6A	96	388,08	386,71	-	120	46	65	
H per cinghia di larghezza 2,00" - 50,8 mm H for 2,00" - 50,8 mm width belt	14 H 200 F	6F	14	56,60	55,23	64,0	40	59	70
	15 H 200 F	6F	15	60,64	59,27	66,5	45	59	70
	16 H 200 F	6F	16	64,68	63,31	70,0	45	59	70
	17 H 200 F	6F	17	68,72	67,35	75,0	45	59	70
	18 H 200 F	6F	18	72,77	71,40	79,0	55	59	70
	19 H 200 F	6F	19	76,81	75,44	82,5	60	59	70
	20 H 200 F	6F	20	80,85	79,48	87,0	62	59	70
	21 H 200 F	6F	21	84,89	83,52	91,0	65	59	70
	22 H 200 F	6F	22	88,94	87,57	94,0	68	59	70
	23 H 200 F	6F	23	92,98	91,61	97,0	72	59	70
	24 H 200 F	6F	24	97,02	95,65	102,0	72	59	70
25 H 200 F	6F	25	101,06	99,69	106,0	72	59	70	
26 H 200 F	6F	26	105,11	103,74	112,0	80	59	70	

H

Passo 12,7mm / 1/2" Pitch

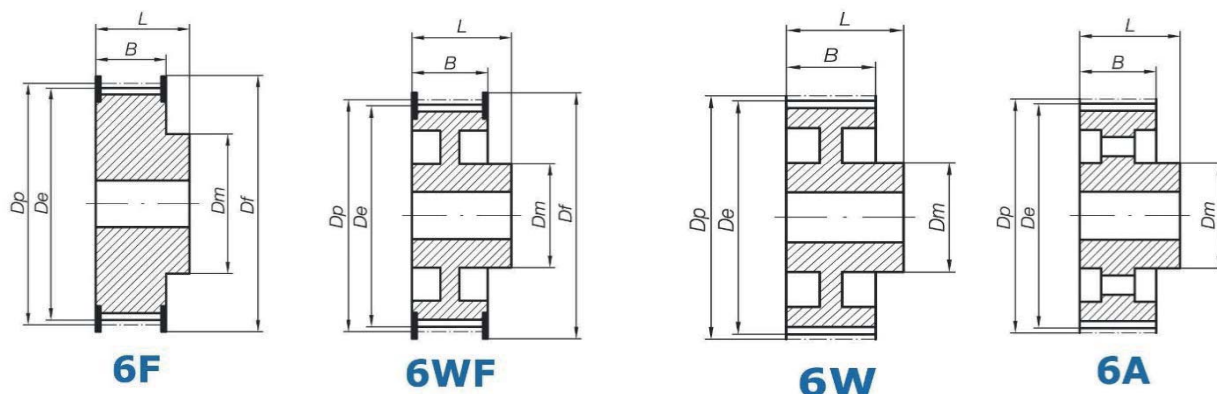

Materiale: Acciaio

Material: Steel

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L
H per cinghia di larghezza 2,00" - 50,8 mm H for 2,00" - 50,8 mm width belt	27 H 200 F	6F	27	109,15	107,78	115,0	80	59	70
	28 H 200 F	6F	28	113,19	111,82	120,0	80	59	70
	29 H 200 F	6F	29	117,23	115,86	120,0	80	59	70
	30 H 200 F	6F	30	121,28	119,91	128,0	80	59	70
	32 H 200 F	6F	32	129,36	127,99	135,0	80	59	70
	33 H 200 F	6F	33	133,40	132,03	142,0	80	59	70
	34 H 200 F	6F	34	137,45	136,08	142,0	80	59	70
	35 H 200 F	6F	35	141,49	140,12	150,0	80	59	70
	36 H 200 F	6WF	36	145,53	144,16	150,0	80	59	70
	38 H 200 F	6WF	38	153,62	152,25	158,0	80	59	70
	40 H 200 F	6WF	40	161,70	160,33	168,0	80	59	70
	44 H 200 F	6WF	44	177,87	176,50	184,0	80	59	70
	45 H 200 F	6WF	45	181,91	180,54	192,0	80	59	70
	48 H 200 F	6WF	48	194,04	192,67	200,0	90	59	75
	50 H 200	6W	50	202,13	200,76	-	90	59	75
	52 H 200	6W	52	210,21	208,84	-	90	59	75
	58 H 200	6A	58	234,47	233,10	-	90	59	75
	60 H 200	6A	60	242,55	241,18	-	90	59	75
70 H 200	6A	70	282,98	281,61	-	100	59	75	
72 H 200	6A	72	291,06	289,69	-	100	59	75	
84 H 200	6A	84	339,57	338,20	-	100	59	75	
96 H 200	6A	96	388,08	386,71	-	120	59	75	
H per cinghia di larghezza 3,00" - 76,2 mm H for 3,00" - 76,2 mm width belt	14 H 300 F	6F	14	56,60	55,23	64,0	40	86	100
	15 H 300 F	6F	15	60,64	59,27	66,5	45	86	100
	16 H 300 F	6F	16	64,68	63,31	70,0	45	86	100
	17 H 300 F	6F	17	68,72	67,35	75,0	45	86	100
	18 H 300 F	6F	18	72,77	71,40	79,0	55	86	100
	19 H 300 F	6F	19	76,81	75,44	82,5	60	86	100
	20 H 300 F	6F	20	80,85	79,48	87,0	62	86	100
	21 H 300 F	6F	21	84,89	83,52	91,0	65	86	100
	22 H 300 F	6F	22	88,94	87,57	94,0	68	86	100
	23 H 300 F	6F	23	92,98	91,61	97,0	72	86	100
	24 H 300 F	6F	24	97,02	95,65	102,0	72	86	100
	25 H 300 F	6F	25	101,06	99,69	106,0	72	86	100
26 H 300 F	6F	26	105,11	103,74	112,0	80	86	100	
27 H 300 F	6F	27	109,15	107,78	115,0	80	86	100	
28 H 300 F	6F	28	113,19	111,82	120,0	80	86	100	

Pulegge Dentate Passo Pollici

Imperial Pitch Timing Pulleys

H

Passo 12,7mm / 1/2" Pitch



Materiale: Acciaio

Material: Steel

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L
H per cinghia di larghezza 3,00" - 76,2 mm H for 3,00" - 76,2 mm width belt	29 H 300 F	6F	29	117,23	115,86	120,0	80	86	100
	30 H 300 F	6F	30	121,28	119,91	128,0	80	86	100
	32 H 300 F	6F	32	129,36	127,99	135,0	80	86	100
	33 H 300 F	6F	33	133,40	132,03	142,0	80	86	100
	34 H 300 F	6F	34	137,45	136,08	142,0	80	86	100
	35 H 300 F	6F	35	141,49	140,12	150,0	80	86	100
	36 H 300 F	6WF	36	145,53	144,16	150,0	80	86	100
	38 H 300 F	6WF	38	153,62	152,25	158,0	80	86	100
	40 H 300 F	6WF	40	161,70	160,33	168,0	80	86	100
	44 H 300 F	6WF	44	177,87	176,50	184,0	80	86	100
	45 H 300 F	6WF	45	181,91	180,54	192,0	80	86	100
	48 H 300 F	6WF	48	194,04	192,67	200,0	90	86	100
	50 H 300	6W	50	202,13	200,76	-	90	86	100
	52 H 300	6W	52	210,21	208,84	-	90	86	100
	58 H 300	6A	58	234,47	233,10	-	90	86	100
	60 H 300	6A	60	242,55	241,18	-	90	86	100
	70 H 300	6A	70	282,98	281,61	-	100	86	100
	72 H 300	6A	72	291,06	289,69	-	100	86	100
84 H 300	6A	84	339,57	338,20	-	100	86	100	
96 H 300	6A	96	388,08	386,71	-	120	86	100	

Df e Dm possono variare senza preavviso / Df and Dm can vary without notice

Nelle forme costruttive gli scarichi di alleggerimento possono leggermente variare / During manufacturing, the lightening relief may vary slightly