


XH

Passo 22,225mm / 7/8" Pitch

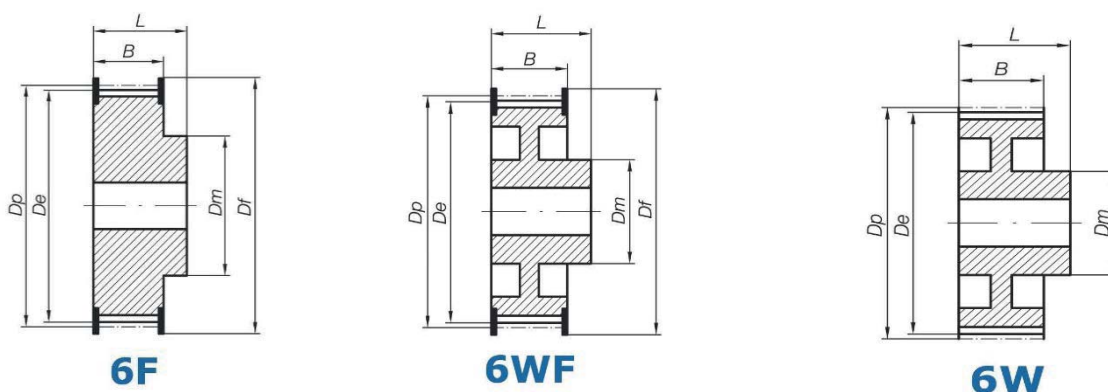

Materiale: Ghisa Material: Cast Iron

	Codice Code	Disegno Drawing	N° Denti Teeth	Dp	De	Df	Dm	B	L
XH per cinghia da 2,00" - 50,8 mm XH for 2,00" - 50,8 mm width belt	18 XH 200 F	6F	18	127,34	124,55	136,0	100	65	80
	20 XH 200 F	6F	20	141,49	138,70	155,0	100	65	80
	22 XH 200 F	6F	22	155,64	152,83	162,0	110	65	80
	24 XH 200 F	6F	24	169,79	167,00	176,0	120	65	80
	26 XH 200 F	6F	26	183,92	181,13	191,0	150	65	80
	28 XH 200 F	6F	28	198,08	195,29	213,0	150	65	80
	30 XH 200 F	6F	30	212,23	209,44	225,0	150	65	80
	32 XH 200 F	6F	32	226,38	223,59	240,0	150	65	80
	40 XH 200 F	6WF	40	282,98	280,19	290,0	150	65	100
	44 XH 200	6W	44	311,28	308,48	-	150	65	100
48 XH 200	6W	48	339,57	336,78	-	150	65	100	
XH per cinghia da 3,00" - 76,2 mm XH for 3,00" - 76,2 mm width belt	18 XH 300 F	6F	18	127,34	124,55	136,0	100	92	110
	20 XH 300 F	6F	20	141,49	138,70	155,0	100	92	110
	22 XH 300 F	6F	22	155,64	152,83	162,0	110	92	110
	24 XH 300 F	6F	24	169,79	167,00	176,0	120	92	110
	26 XH 300 F	6F	26	183,92	181,13	191,0	150	92	110
	28 XH 300 F	6F	28	198,08	195,29	210,0	150	92	110
	30 XH 300 F	6F	30	212,23	209,44	225,0	150	92	110
	32 XH 300 F	6F	32	226,38	223,59	240,0	150	92	110
	40 XH 300 F	6WF	40	282,98	280,19	290,0	150	92	120
	44 XH 300	6W	44	311,28	308,48	-	150	92	120
48 XH 300	6W	48	339,57	336,78	-	150	92	120	
XH per cinghia da 4,00" - 101,6 mm XH for 4,00" - 101,6 mm width belt	18 XH 400 F	6F	18	127,34	124,55	136,0	100	119	132
	20 XH 400 F	6F	20	141,49	138,70	155,0	100	119	132
	22 XH 400 F	6F	22	155,64	152,83	162,0	110	119	132
	24 XH 400 F	6F	24	169,79	167,00	176,0	120	119	132
	26 XH 400 F	6F	26	183,92	181,13	191,0	150	119	132
	28 XH 400 F	6F	28	198,08	195,29	210,0	150	119	132
	30 XH 400 F	6F	30	212,23	209,44	225,0	150	119	132
	32 XH 400 F	6F	32	226,38	223,59	240,0	150	119	132
	40 XH 400 F	6WF	40	282,98	280,19	290,0	150	119	132
	44 XH 400	6W	44	311,28	308,48	-	150	119	132
48 XH 400	6W	48	339,57	336,78	-	150	119	132	

Df e Dm possono variare senza preavviso | Df and Dm can vary without notice

Nelle forme costruttive gli scarichi di alleggerimento possono leggermente variare | During manufacturing, the lightening relief may vary slightly